


GEL DEEP CYCLE SERIES


MODEL: JS100-12(GEL) 12V 100Ah 10HR



Plane Chart:

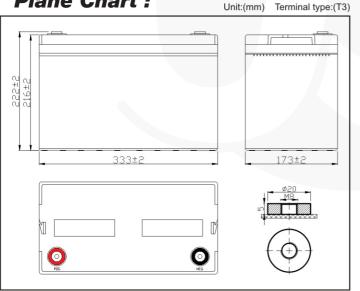

Package:

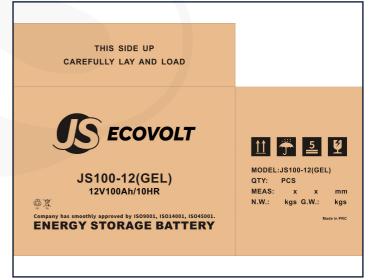




GEL DEEP CYCLE SERIES

MODEL: JS100-12(GEL) 12V 100Ah 10HR


Parameter Chart:

Volts		12V						
Capacity (25°C		100Ah						
Discharge Curre		59Ah						
Testing (25°C)		79Ah						
Internal Resistar	Internal Resistance			Full Charged Battery 25°C				
		104%						
Capacity Affect	Capacity Affected By Temperature			25°C				
By Temperatur				0°C				
				-15°C				
				lonths Storage	91%			
Residual Capac (25°C)	Residual Capacity (25°C)		city After 6 M	lonths Storage	82%			
		Capac	city After 12 N	Months Storage	65%			
Charge (constant	cle (25°C)		Initial Charging Less Than 3 Voltage 14.5 ~	30A				
voltage)	Flo	at (25°C)		Charge Voltage 13	5.6 ~ 13.8V			
	Weight (App	rox)		31.2	2Kg			

Residual Capacity

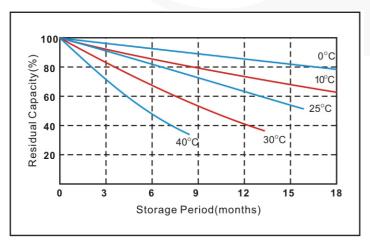

Discharge Current 25°C

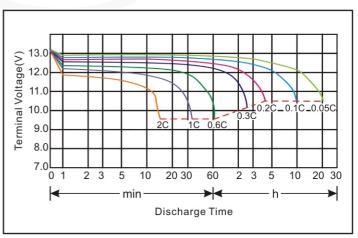


★ The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.




GEL DEEP CYCLE SERIES

MODEL: JS100-12(GEL) 12V 100Ah 10HR

Constant voltage charging characteristics

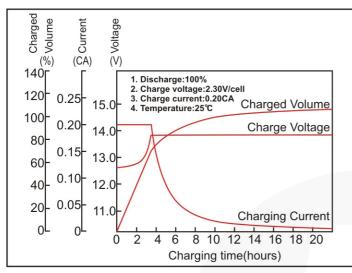

Cycle service life in relation to the depth of discharge

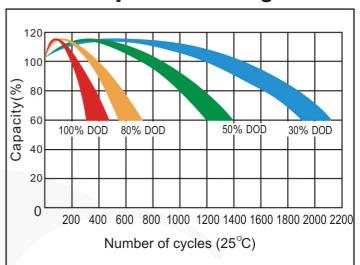

Contstant Curent Discharge Characteristics (A,25°C)

F.V/Time	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	220.4	175.4	108.2	65.1	36.6	26.5	18.5	12.2	10.2	5.4
10.2V	209.4	168.3	104.2	62.5	36.1	26.1	18.2	12.1	10.1	5.4
10.5V	203.4	164.3	101.2	61.2	35.8	25.9	18.0	12.1	10.0	5.3
10.8V	196.4	160.3	99.00	59.4	35.4	25.6	17.8	12.0	10.0	5.3

Contstant Power Discharge Characteristics (Watt, 35°C)

F.V/Time	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	2380.8	1925.8	1214.4	742.5	423.8	310.6	219.4	146.3	123.2	64.8
10.2V	2261.5	1848.7	1169.3	712.4	417.8	306.6	215.4	145.7	122.2	64.3
10.5V	2196.4	1803.6	1159.3	708.4	413.8	303.6	212.4	145.3	121.2	64.1
10.8V	2121.2	1760.5	1111.2	677.4	409.8	300.6	210.4	144.3	119.2	63.7

Capacity Factors With Different Temperature

Battery	Туре	-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%

[★]The above are average and data obtained from the firsr 3 charge/discharge cycles. These are not minimum values.