



Advantages

- TÜV certified to IEC 62852
- Accomodate PV cables with vary diameters
- High current carrying capacity
- Efficient snap in locking system for easy and safe install
- Reliable in harsh conditions
- IP67 water proof and dust proof
- Low transition resistance





Construction

■ Male

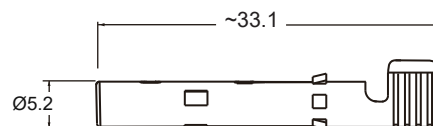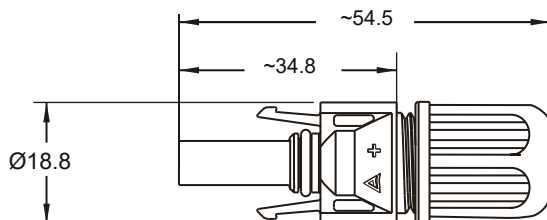

■ Female

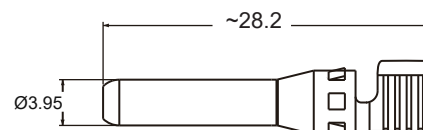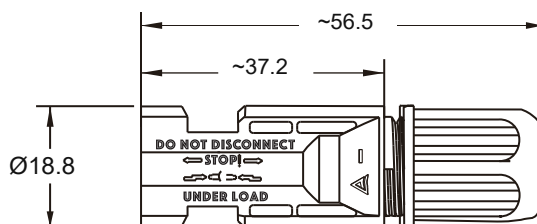

Technical data

Rated voltage	1000V DC	Operating Temp. Range	-40°C to 90°C
Rated current (per IEC 62852, 85°C)	17A (1.5mm ²) 22.5A (2.5mm ²) 30A (4.0mm ² , 6.0mm ²)	Overvoltage category /Pollution degree	CAT III/2
Test voltage	6kV(50Hz,1min.)	Protection Degree	IP67
Contact material	Tin-plated Copper Alloy	Flame class	UL-94-V0
Contact resistance	≤ 0.3mΩ	Type of termination	Crimping
Insulation material	PPO	Contact system	Stamped
Locking system	Snap-in	Cable OD range	Ø4.5mm – 7.8mm

